

FORM PTO-1390
(REV. 9-2001)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

26769-4

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/018378

INTERNATIONAL APPLICATION NO.

PCT/US00/18698

INTERNATIONAL FILING DATE

July 7, 2000

PRIORITY DATE CLAIMED

July 9, 1999

TITLE OF INVENTION

NETWORK ADDRESSING SYSTEM AND METHOD USING TELEPHONE NUMBERS

APPLICANT(S) FOR DO/EO/US

HARRIS, Mark J.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☐ Other items or information:

ATTORNEY'S DOCKET NUMBER
26769-4

FORM PTO-1390 (REV 9-2001) page 2 of 2

3/pvls

MJH 2 0002 PCT

NETWORK ADDRESSING SYSTEM AND METHOD USING TELEPHONE NUMBERS

Cross Reference to Related Application

This application claims the benefit of U.S. Provisional Application Serial No. 60/143,246 filed July 9, 1999.

Field of Invention

The present invention relates to network addressing over internets and intranets. The invention finds particular application in converting telephone numbers into a multi-level domain name to enable devices on a network to communicate. It is to be appreciated however, that the present invention may find further application in private networks or public networks and using private protocols or internet protocols.

Background of Invention

Originally, only numbers were used as network addresses on the internet. The numbers are called Internet Protocol numbers, or in short, an IP address. These numbers had virtually no meaning to anyone and were hard to remember.

Later, the Internet Assigned Number Authority (IANA) created a Domain Name System. Each domain name would use a more understandable and meaningful name to point to an IP address. For Example, "IBM.com" is a domain name that routes a user to a specific IP number or address such as 198.81.209.2 (an IBM IP address). Now, the entire world of the Internet users find themselves using this internet domain

name registration system which is a core component in getting an internet presence.

A domain name typically includes a name, plus a "." (dot) or separator, and a Top Level Domain (TLD) such as "com",
5 "net", and "org".

While the domain name system made addresses easier for people to remember, the internet domain name registration system suffers from several current problems. For example, there is a limited supply of internet domain names. Only one
10 company can own or register any given name on the internet such as Computers.com. Other top level domains can be employed such as Computers.net and Computers.org but these options are considered inferior to Computers.com. A second problem is the high cost of internet domain names. Name
15 exclusivity has created a booming internet domain name market which has some domain names reportedly selling for millions of dollars. Also, the current monopoly and/or limited number of domain name registrants, have caused all domains in general to be more expensive.

20 A second problem is that currently internet domain names can take up to 72 hours to activate. This creates a problem for those internet users who need to set up their site quickly. Moreover, once registered, an internet domain name is fixed. A change of even one letter from the original
25 domain name becomes a new name and must be reregistered. This need to register a domain name incurs additional cost and runs the risk that the new name may not be available. Indeed a cottage industry of domain name registrants or cyber-squatters has surfaced because they anticipate that
30 eventually someone will need, and pay for, the name they are

registering. This "inflexibility" becomes a bigger issue with the convergence of the internet and telephone networks.

An attempted solution to some of the problems outlined above is a sub-directory based system of Domain Names called the "Forward Slash" method. For example, a company such as Realtor.com would add a Real Estate Agent's name to the end of the string of characters separated by a forward slash i.e. Realtor.com/AgentsNameHere. This would give the Agent a connection to an inexpensive web site because it is a part of the big company Realtor.com. There is theoretically, no limit to how many forward slashes could be added at the end of each string of characters. However, this method also has drawbacks, such as:

A. **Not IP Addressable** - This means that an individual "site" does not have the option to have a unique IP address and/or a shared one. The only option is a shared IP address with the primary domain name holder.

B. **Time Delay**- If a "Site" forwards a user to another site, the user has to wait for it to do so.

C. **Longer Addresses** - When using the "Forward-Slash" method, the address is almost always longer which creates more problems:

1. The longer address increases the complexity for users because there are more characters to type making more room for errors.

2. The longer address is harder to communicate to others such as a radio announcer saying "Check out Realtor dot com forward slash Agent's Name Here forward slash City."

3. It is too long to remember without writing it down and pen and paper are not always immediately available.

5 D. **Lack of Uniqueness** - Companies using the Forward Slash method need to use names that are relevant to the specific sub-site yet unique so as not to duplicate the sub-site names because each name can only be used once. This method is difficult in practice.

10 Business communications such as advertisements, literature, business cards etc. have to include both an internet address as well as a telephone number because of the success of the internet and the ubiquity of the telephone. Using both pieces of information not only creates more information to remember but also clutters the design of the
15 piece of communication.

The above has led some companies to use a telephone number in their domain name. Using a telephone number in an internet domain name is not new. The approaches that the following companies use are severely limited to very specific
20 applications or companies.

As people have started to participate on the internet, some companies have slowly started to integrate telephone numbers into an internet address. Very few individuals and/or organizations have registered an actual dial-able telephone
25 number as an internet domain name.

Probably the most popular telephone number/internet domain Name is "1-800-Flowers.com". This was a natural use for the company since it is their company name, as well as their phone number. This approach once again has a number
30 of the drawbacks of internet domain names in general, as described above. Of interest is the fact that only a single

sub-domain, i.e. "1-800-flowers", is employed. Specifically, this approach has a higher cost than that of the forward slash method and has the additional problem of a potential lack of availability. Additional problems with this approach are more fully discussed below, as they pertain to network providers. Other similar references are "www. 411.com", and "www.1-800-555-1212.com", both having similar challenges.

The present invention contemplates an improved method and apparatus for a network addressing system which includes a telephone number as a component of the address.

Summary of the Invention

In accordance with one embodiment of the present invention, a method includes receiving a telephone number portion which identifies a device with which communication is desired. The telephone number portion is converted into a multiple level domain name which statically represents the device on the network. A component of the multiple level domain name is the received telephone number portion.

Communication is then established with the device over the network.

In accordance with another aspect of the present invention, the converting step includes adding domain separators to the received telephone number portion at determinable locations in the received telephone number portions.

In accordance with another aspect of the present invention, the received telephone number portion includes a separator, and the converting step includes parsing the received telephone number portion for the separator and inserting a domain separator therefor.

In accordance with another aspect of the present invention, additional domain levels are appended to the converted telephone number portion to complete the multiple level domain name.

5 In accordance with another embodiment of the present invention, an apparatus to establish communication between at least two devices over a network includes a processor which receives from a first device a telephone number portion identifying a second device. The processor then converts the
10 telephone number portion into a static multiple level domain name sufficient to identify the second device on the network.

In accordance with another aspect of the present invention, the apparatus further includes a table which matches the static multiple level domain name to a static IP
15 address.

One advantage of the present invention resides in the ability to have internet domain names that are meaningful and simultaneously more economical than traditionally used.

Another advantage of the present invention resides in
20 the ability to convey both an internet address and a telephone number compactly and economically in a communication.

Still further advantages of the present invention will become apparent to those of ordinary skill in the art upon
25 reading and understanding the following detailed description of the preferred embodiments.

Brief Description of the Drawings

The invention may take physical form in certain parts
30 and arrangements of parts, and in certain steps and arrangements of steps. The drawings are only for purposes of

illustrating the preferred embodiments and are not to be construed as limiting the invention.

FIGURE 1 is a generic representation of a typical network addressing system or domain name structure;

5 FIGURE 2 is an exemplary U.S. telephone number;

FIGURE 3 is the telephone number of Figure 2 following conversion into a multiple level domain name;

FIGURE 4 is a flowchart detailing a logical flow that suitably practices the present invention; and,

10 FIGURE 5 is a graphical depiction of device connectivity across a network as provided by the present invention.

Detailed Description of the Preferred Embodiments

As used herein an internet telephone number or numbering
15 system is defined as a domain name or set of domain names that enables network addressing system through the use of telephone numbers or internet/intranet networks.

A telephone number portion is herein defined as at least a part of a telephone number which can include the exchange, the area code, and/or the country code. While telephone
20 numbers generally have gradually increasing geographic specificity with the most generic portion preceding more definite portions, (i.e. the country code precedes the area code which precedes the exchange, etc.) the particular order
25 in which a telephone number portion is converted or presented as a static multiple level domain name is immaterial according to the present invention. That is, the received telephone number may be rearranged in any sequence without materially affecting the scope of the subject invention so
30 long as all are likewise arranged or determinable.

As use herein the terms source, target, and/or device are intended to refer to any variety addressable devices interconnected via any of a variety of networks. For example, devices amenable to the present invention include
5 without limitation, computers, storage devices, output devices, telephones, personal information managers, laptop, palmtop, or watch based computers, and the like. Interconnecting networks include without limitation, intranets, or the internet, wireless and/or wireline
10 telephone networks, either public or private, hardwired, infrared, optical, or electro-magnetic networks and the like.

With reference now to Figure 1, the existing domain name structure is generically illustrated. This structure includes a Base Level Domain (BLD) 10. The base level domain
15 10, sometimes called a top level domain or first level domain, is not associated with an IP address itself but is a logical grouping used to distinguish between Countries (e.g. .US, .CA, .UK, .HK, etc.); Colleges (e.g. .EDU); US Military (e.g. .MIL); US Government (e.g. .GOV); Corporations (e.g.
20 .COM, .ORG); and ISP's (e.g. .NET). These base level domains manage any inquiries to the second level sub-domains 12. The second level sub-domain 12 is normally associated with an IP address when used in conjunction with a BLD 10. An example of a second level domain name is IBM as used in IBM.COM, or
25 OSU as used in OSU.EDU. The second level domain 12 usually manages any inquiries to the third level sub-domain 14. The third level sub-domain 14 is also normally associated with an IP address when used in conjunction with both .2LD.BLD 12, 10. An example of a third level domain name is SUPPORT as
30 used in SUPPORT.IBM.COM. The third level sub-domain 14 usually manages any inquiries to the fourth level sub-domain

16. The fourth level sub-domain 16 is usually associated with an IP address when used in conjunction with .3LD.2LD.BLD 14, 12, 10. Some examples of a fourth level domain name are PC or AIX as used in PC.SUPPORT.IBM.COM or

5 AIX.SUPPORT.IBM.COM. The fourth level sub-domain 16 usually manages inquiries to the next domain 18 and so on. The Nth level domain 18 represents any and all higher level domains where the N represents integer intervals of higher level domains (i.e. 2, 3, 4, 5, 6,...). All domain names can
10 contain words or phrases consisting only of letters, numbers, and the dash, (a...z, 0..9, '-').

All domain name levels 10-18 are separated by the 'dot', the domain separator 30. This separator 30 is used to designate managing control of higher domain levels to their
15 next lower domain level. Complete domain names consist of two parts: a domain name segment 34 and a base level segment 38. A base level segment 38 contains a .BLD 10, and contains any number of upper level sub-domains. Some examples of base level segments 38 are single level segments (e.g. .COM, .NET)
20 and multi level segments (e.g. IBM.COM; ABC.DEF.ORG; one.two.three.four.five.six.NET). Domain name segments are any group of one or more discrete 'names' separated by a dot 30 that does not contain a .BLD 10. Some examples of domain name segments are single level segments (e.g. ABC, IBM,
25 telenumbr) and multi-level segments (e.g. ABC.DEF, Support.IBM, one.two.three.four.five.six.etc). These segments, when combined, form a complete domain name. A domain name tree 42 is any number of domain name segments 34 appended by a base level segment 38.

30 With reference now to Figure 2, a telephone number portion 50 is entered for translation into a single or

multiple level domain name segment 34 enabling that segment to be grafted onto any existing domain name tree 42 at any point in that tree. The translation of the telephone number portion 50 consists of reducing the number into discrete
5 pieces 52, 54, 56, 58 based on the natural separators 70, 72, 74 of that number, (e.g. dash, parenthesis, dot, or the like). These separators 70, 72, 74 are replaced with a domain separator 30 and the discrete pieces 52, 54, 56, 58 become domains and sub-domains.

10 Referring now to Figure 3, the multi-level domain name resulting from the entry illustrated in Figure 2 is shown. The telephone number portion 50 was parsed for separators 70, 72, 74 and assuming left to right scan, the separators will likewise be replaced from left to right. Thus Figure 2
15 separator 70 becomes domain separator 80 in Figure 3. Likewise Figure 2 separators 72, 74 are substituted with domain separators 82, 84 in Figure 3.

Continued reference to Figure 3 also illustrates appending of additional domain levels onto a converted or
20 translated telephone number portion 50 (Figure 2). In the illustrated example, to complete the multiple level domain name with respect to a particular web server, the additional sub domain, "telenium" 90 and the top level domain, ".com" 92 are appended. Those skilled in the art will now
25 appreciate that domain levels may be appended anywhere in the multiple level domain name without departing from the spirit of the present invention. Moreover, further domains or sub-domains can be used for other country codes, area codes, telephone exchanges, etc.

30 With respect now to Figure 4, an exemplary process is illustrated by which the telephone number portion of Figure 2

for example is converted into that of Figure 3. The user enters a query or a domain name which includes a telephone number portion suitable to identify a target or desired device across a network, as seen in step 100. An ambiguity
5 may be introduced at this point when the processor determines where to place the domain separators 30. In the illustrated embodiment, the ambiguity may be resolved, as seen by decision block 102, depending on whether the user enters separators in their query. If so, the processor then
10 substitutes domain separators 30 for the user entered (manually or according to some predetermined protocol) organic separators 70, 72, 74 as seen in step 106 and illustrated in Figures 2 and 3. On the other hand, if no user entered separators are detected, or if an insufficient
15 number of organic separators are included as determined by decision block 102, then domain separators 30 will be inserted at determined locations based on information from, or data stored with the user (e.g. in cookies, or other predetermined protocol), assumptions made based on the
20 particular protocol in use, or between determined numbers of digits or the like, as illustrated by step 108.

With the domain separators in place from either step 106 or 108, a quasi-multi level domain name exists. Optionally then, the processor may affix any prefixes or suffixes needed
25 to generate a complete multiple level domain name or as may be required based on known factors, as seen in step 110. For instance, an originating user may omit the country code, for example, of their target or desired device. In this case, the processor will recognize the insufficiency or ambiguity
30 resulting from too few sub-domains in the address and substitute or append the country code of the originating

user. Similar additions can be made by suffix if desired (e.g. automatic appending of a base level domain). The target device is then queried across the network at the multiple level domain name generated, as seen in block 112.

- 5 If the target device is available, it will respond in a like fashion at which point communication can be established between the source and the target devices, as seen in step 114.

With reference now to Figure 5, a generic system 120 is shown connected to a network 122 for suitably practicing the invention. A device 124 is connected to server 120. A processor 120a within the server receives from the device 124 a telephone number portion 50 (Figure 2) address intended to identify a second device 128. The processor 120a converts the telephone number portion into a static multiple level domain name 96 (Figure 3) identifying the second device 128 through the network 122. For illustration purposes, the device 128 is illustrated as also being connected to the network 122 via its own server, however numerous other interconnections are envisioned and apply with equal facility. The processor 120a determines the presence or lack of organic separators and, as discussed above, generates a complete multiple level domain name 96 suitable to identify device 128. The completed multiple level domain name 96 is then optionally converted in memory 120b to a standard IP address in this example. The target device 128 is then queried at the converted IP address location, and if available, responds to the query. The details of packet switching and call setup through the network along with path selection through the network are known to those in the art and proceed here conventionally.

The invention has been described with reference to the preferred embodiment. Obviously, modifications and alterations will occur to others upon the reading and understanding of the specification. It is our intention to
5 include all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

Having thus described the preferred embodiments, the invention is now claimed to be:

1. A method comprising:
receiving a telephone number portion identifying a device;
converting the telephone number portion into a
5 multiple level domain name identifying the device over a network, the multiple level domain name comprising the telephone number portion and a base portion; and
establishing communication with the device via the multiple level domain name over the network.
2. The method as set forth in claim 1, where the telephone number portion of the multiple level domain name is subordinated to the base portion.
3. The method as set forth in claim 2, where the base portion of the multiple level domain name comprises a base level domain.
4. The method as set forth in claim 1, where the converting step comprises:
adding domain separators to the received telephone number portion at determinable locations in the received
5 telephone number portion.
5. The method as set forth in claim 1, where the received telephone number portion comprises a separator, the converting step comprising:

5 parsing the received telephone number portion for
the separator; and

inserting a domain separator for the parsed
separator.

6. The method as set forth in claim 1, further
comprising:

5 appending additional domain levels to the converted
telephone number portion to complete the multiple level
domain name.

7. A method of communicating over a network
comprising:

5 receiving from a first device at least a portion of
a static, multiple level domain name including a telephone
number portion identifying a second device;

determining availability of the second device on
the network; and

10 in response to the determining step, selectively
establishing communications from the first device to the
second device.

8. The method as set forth in claim 7, further
comprising:

establishing communications from the second device
to the first device.

9. The method as set forth in claim 7, where the determining availability step comprises:
 querying the second device over the network; and
 receiving a response from the second device
5 indicative of second device availability.

10. An apparatus to establish communication between at least two devices over a network, the apparatus comprising a processor which receives from a first device a telephone number portion identifying a second device, and which
5 converts the telephone number portion into a static multiple level domain name identifying the second device on the network.

11. The apparatus as set forth in claim 10, where the processor further establishes communication with the second device over the network.

12. The apparatus as set forth in claim 10, further comprising a table which matches the static multiple level domain name to an IP address.

13. The apparatus as set forth in claim 10, where the processor further adds domain separators to the received telephone number portion at determinable locations to result in the static multiple level domain name.

14. The apparatus as set forth in claim 10, where the received telephone number portion comprises a separator, and where the processor parses the received telephone number

portion for the separator and inserts a domain separator for
5 selected instances of the parsed separator.

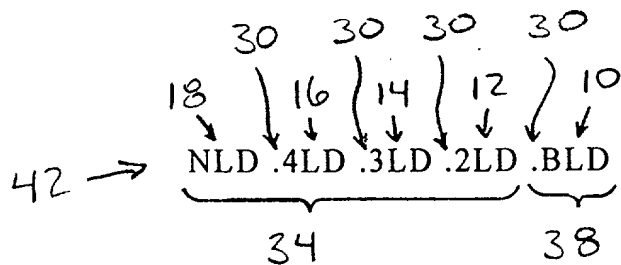


FIGURE 1

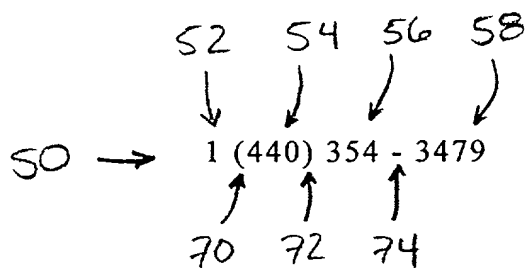


FIGURE 2

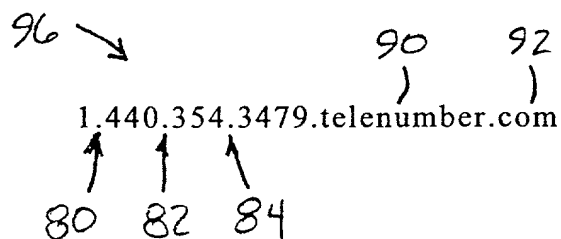


FIGURE 3

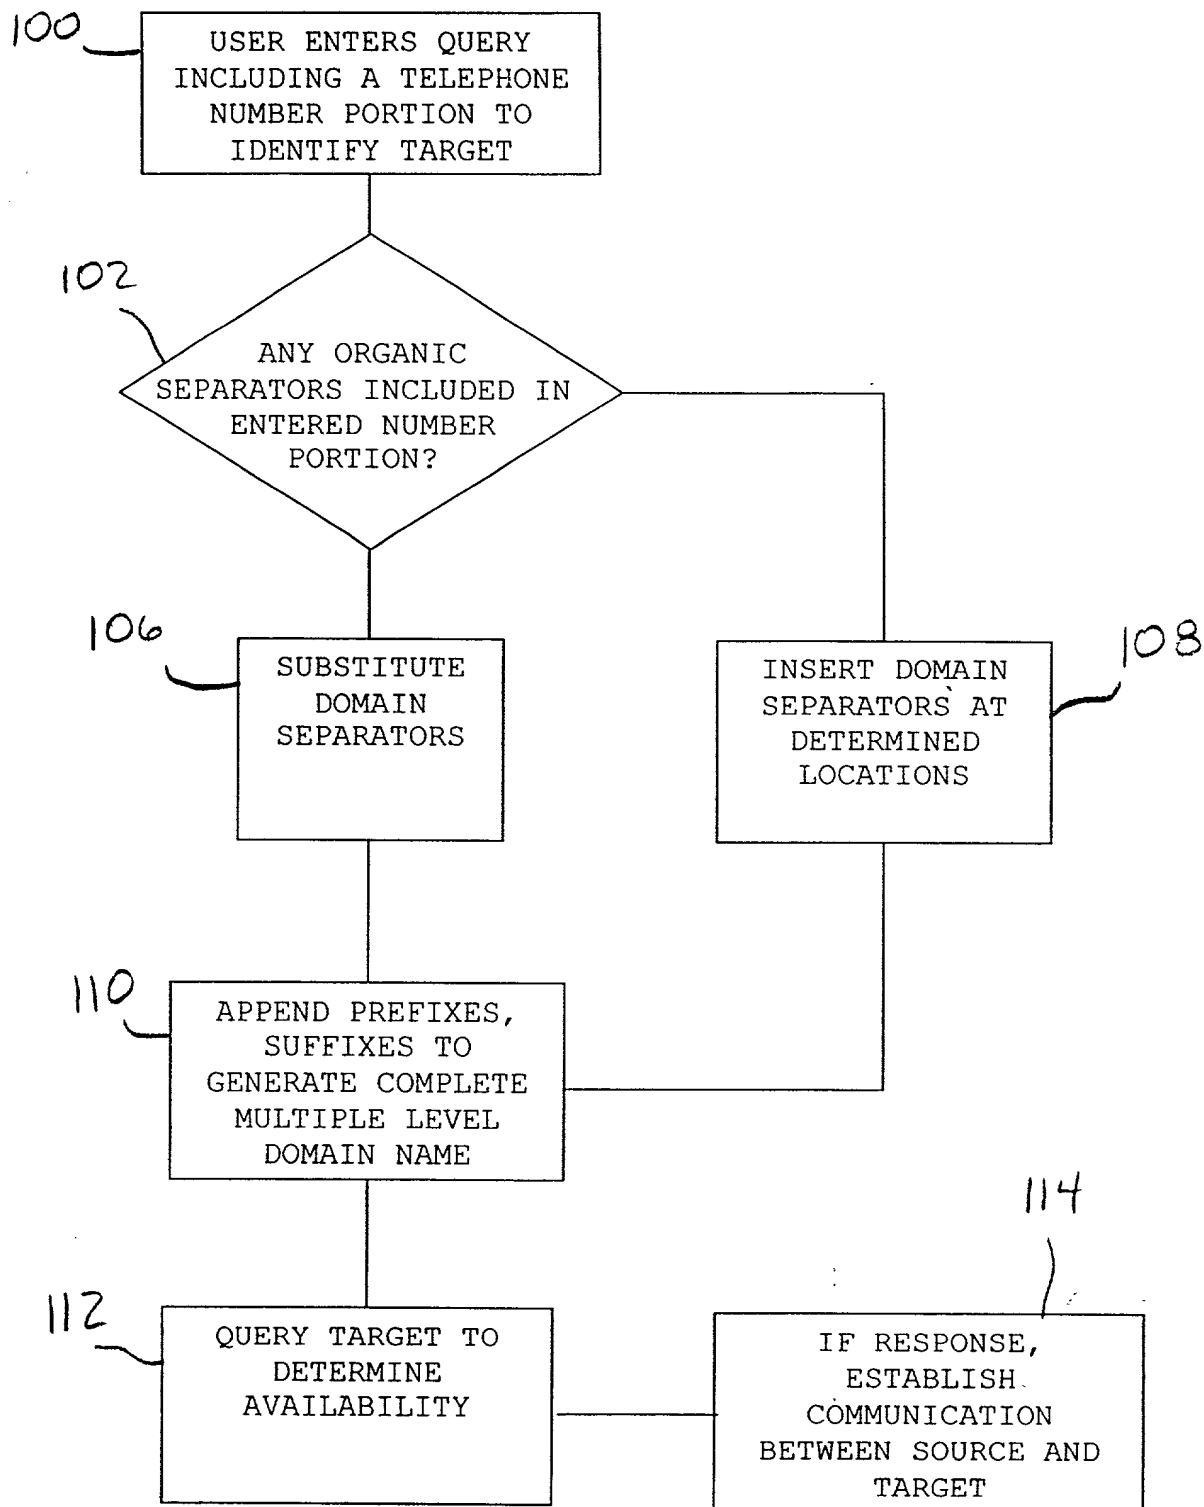


FIGURE 4

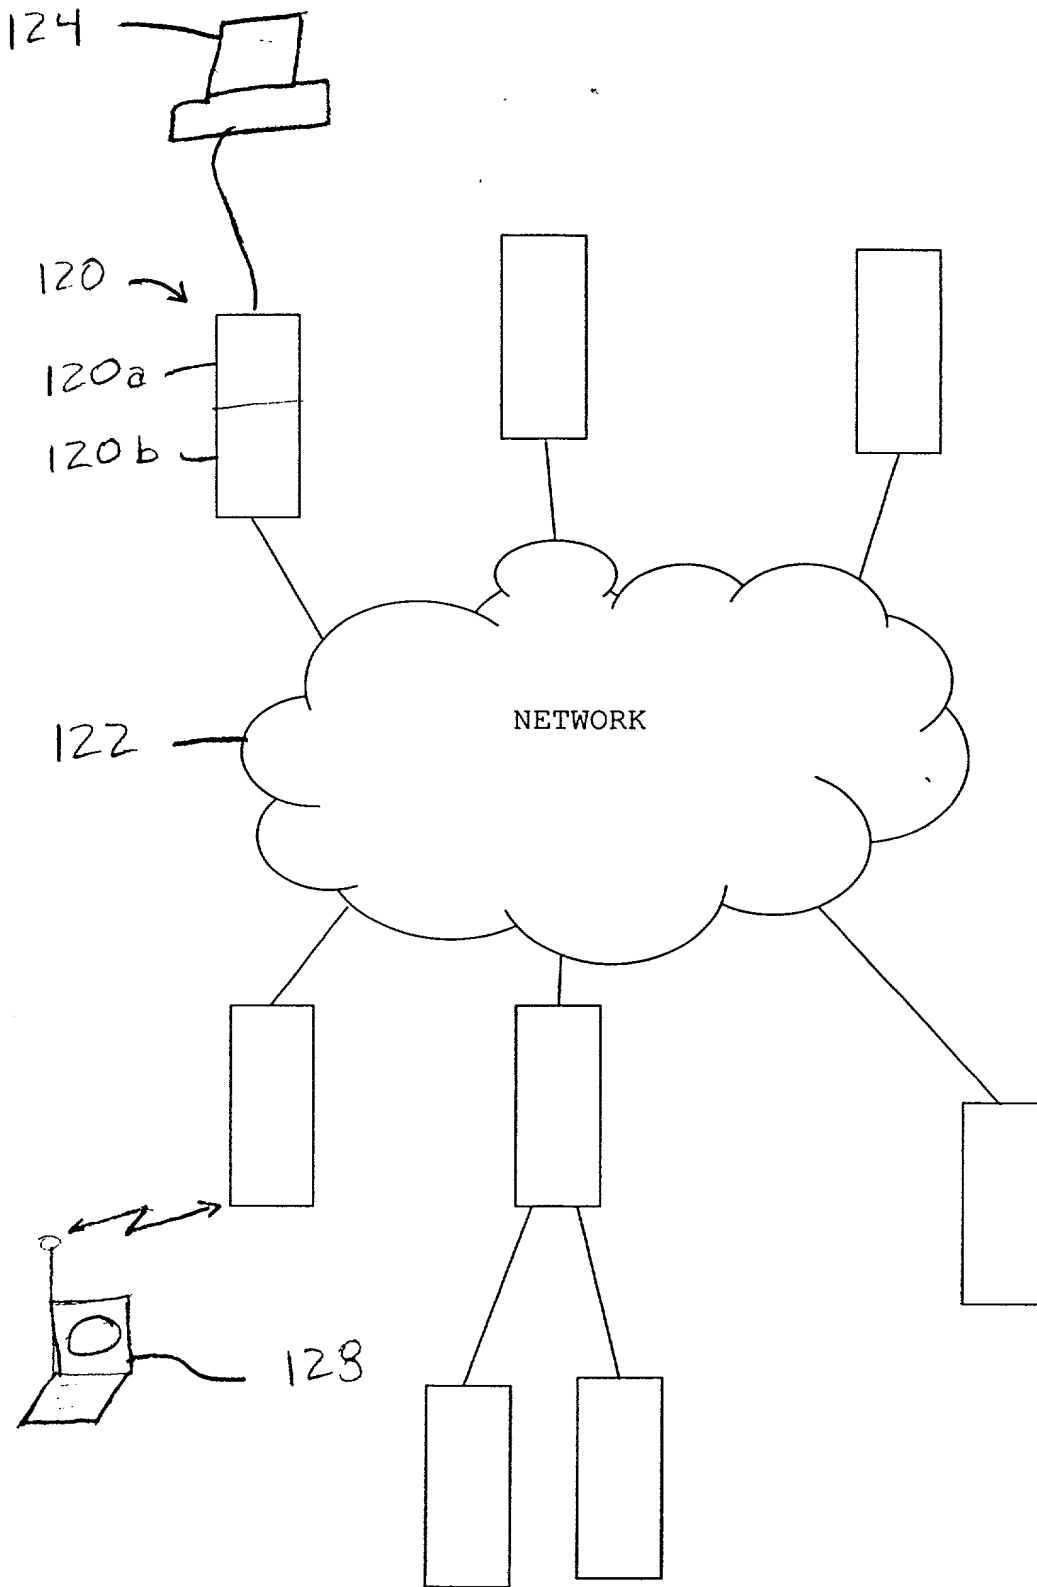


FIGURE 5

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As the below named inventor, I hereby declare that:

This declaration is of the following type:

- ☐ Original
- ☐ Design
- ☐ Supplemental
- ☒ National stage of PCT
- ☐ Divisional
- ☐ Continuation
- ☐ Continuation-in-part

My residence, post office address, and citizenship are as stated below next to my name.

I believe that I am the original inventor of the subject matter which is claimed, and for which a patent is sought on the invention entitled:

NETWORK ADDRESSING SYSTEM AND METHOD USING TELEPHONE NUMBERS

the specification of which is attached hereto, unless the following box is checked:

☒ that was filed on **July 7, 2000** as **PCT Application Serial No. PCT/US00/18698**.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

☒ and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, and

in compliance with this duty, there is attached an information disclosure statement, in accordance with 37 C.F.R. § 1.98.

I hereby claim foreign priority benefits under Title 35, United States Code, §§ 119(a) - (d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

NONE

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

NONE

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Serial No. PCT/US00/18698; Filed July 7, 2000

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

W. Scott Harders, Reg. No. 42,629
Raymond A. Miller, Reg. No. 42,891
Gregory S. Kolocouris, Reg. No. 47,714
Steben M. Auvil., Reg. No. 40,492
W. Joseph Melnik, Reg. No. 48,741
Arthi K. Tirey, Reg. No. P-50,960

Address all telephone calls to : W. Scott Harders
at telephone number : (216) 363-4443

Address all correspondence to Customer Number 21130.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Mark J. Harris

Mark J. Harris
Mark J. Harris
12/18/01

12/18/01

~~1 Cherry Tree Lane~~
~~Painesville, Ohio 44077~~

PO BOX 370 VH
Clear Brook VA 22624

United States of America